

### EXTERNAL DIFFERENTIAL GNSS RECEIVER

This option allows to use high-precision satellite navigation receiver with differential RTK corrections. System uses the GPS/GLONASS/Galileo/BeiDou satellites. It is online connected to server providing differential corrections via Mobile Broadband. Precise location is transferred to KrabDroid computer for logging and further processing.




Comparison of measured data with common GPS (above) and external differential GNSS receiver (below).



### RAIL PROFILE MEASUREMENT

3D cameras using triangular principle are applied for non-contact continuous scanning of the rail profile in regular step 0.25m. The rail head wear is calculated and displayed in real time as well as the shape of the rail head. The parameter of equivalent conicity is available in data post-processing. Both rails or only one rail can be measured simultaneously depending on chosen configuration.

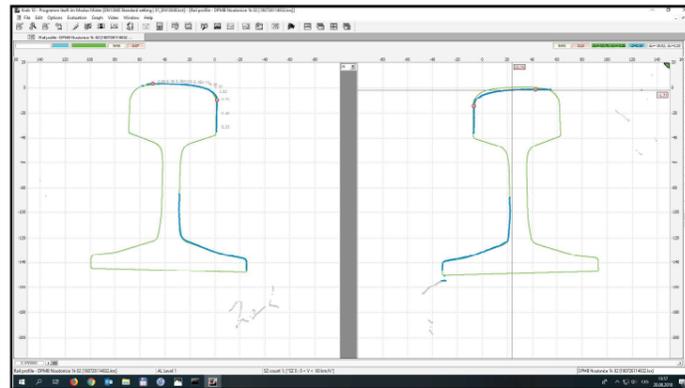

## KRAB additional accessories

The basic Krab S-Light device providing full track geometry parameters can be extended by number of auxiliary accessories covering a wide range of new functionalities. All auxiliary devices are fully integrated under basic track geometry data acquisition.




**Manufacturer:**  
Komerční železniční výzkum, spol. s r.o.  
U Kaplických 1199, PRAGUE 6, CZ-165 00  
tel./fax.: +420 233 920 185  
cell.: +420 604 830 199  
e-mail: [jturek@kzv.cz](mailto:jturek@kzv.cz), web: [www.kzv.cz](http://www.kzv.cz)



**KRAB CAMERA, IP CAMERA**

KrabCamera and IP Camera are an additional systems for Krab measuring trolleys. It allows to take pictures of the track, rails, sleepers or any other objects around measured railway track. Pictures are synchronized with Km position and taken in optional step (typically 1 to 10 m). KrabCamera application runs on a conventional Android smartphone and saves the images to its own memory, while IP Camera stores the images into the measuring smartphone memory. The IP camera is attached to an extension arm and can be folded after the measurement, so the trolley can be placed in a transportation box. After the measurement is finished, data from KrabCamera or IP Camera and from KrabDroid measuring software are downloaded to PC. They can be processed by Krab 11 evaluation software.

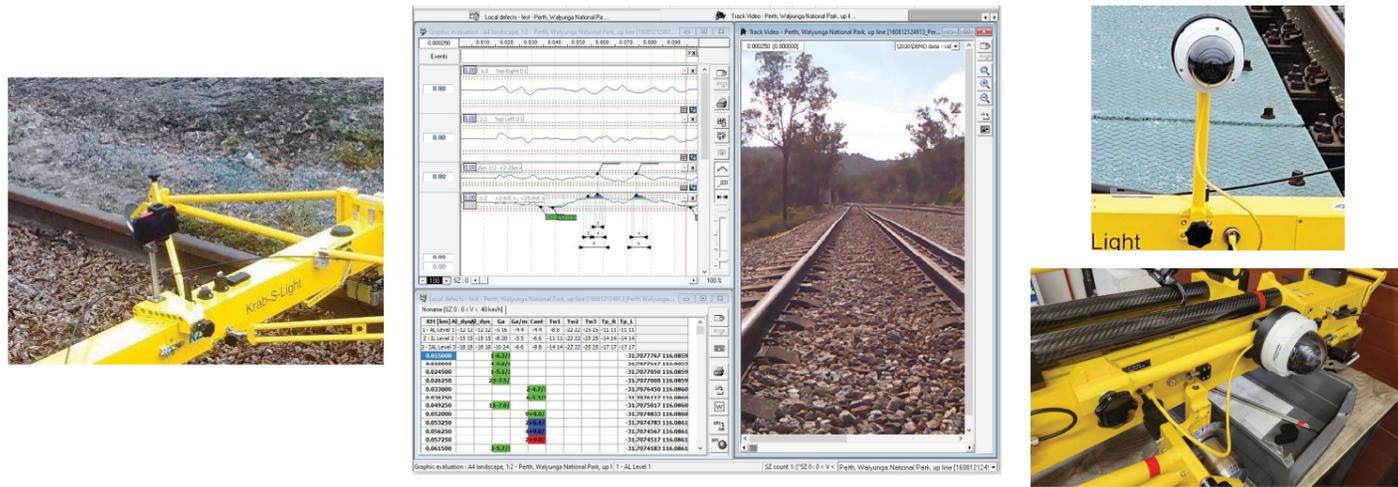

**360° CAMERA**

The 360° camera allows to capture the full 360° view around the trolley.



**DIMETIX**


DIMETIX option serves for operational checking of position. It uses two sensors - laser distance meter + incremental rotary sensor. Using these two sensors the 2-dimensional position of the objects around the track can be detected. Laser distance meter is positioned manually.



*Krab-S-Light equipped with DIMETIX option*

**IMU - Inertial Measuring Unit - option for measuring in D2 waveband**

Family of Krab trolleys (Krab84.09, Krab-S-Light, Krab U-Light), can be additionally equipped with an IMU. IMU is designed for continuous and real-time inertial measurement of track geometry quantities Alignment, Top and Cant. The IMU sensors consists of the gyroscopes and accelerometers. Therefore all directions of movement are recorded and used for calculations. The output data can be used for calculations of Real geometry, Chord geometry and D1, D2 or even D3 wavebands.

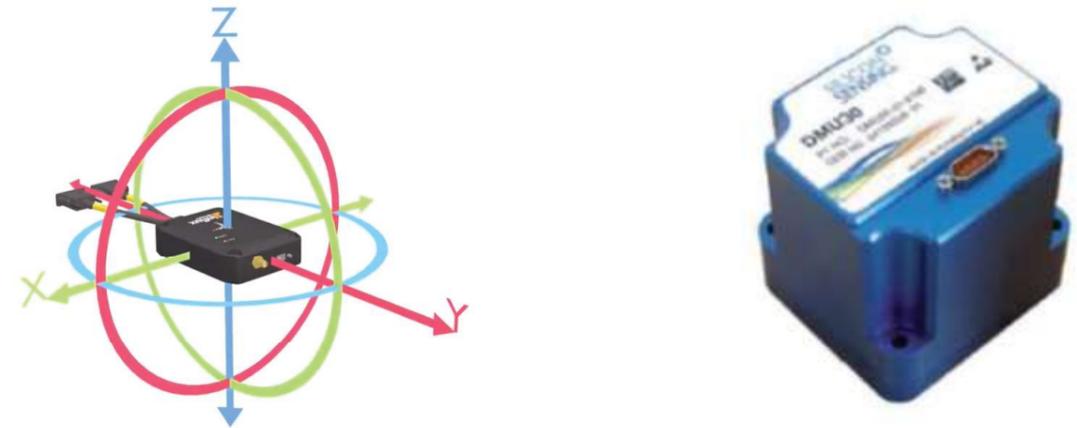


**Additionald corrugation measuring unit**

Krab S-Light trolley can be additionally equipped with a corrugation measuring unit. This gives the Krab S-Light trolley wide range of measured quantities. The corrugation unit is placed in a box, which is attached to a measuring triangle arm. Data gained with the corrugation measurement unit can be evaluated in Gekon 11 software.



*Krab-S-Light equipped with additional corrugation measuring unit*

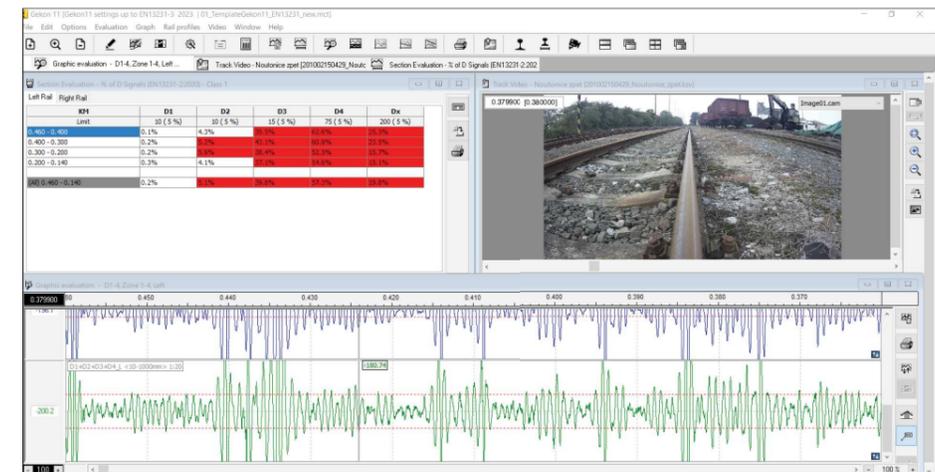

*Example of corrugation evaluation in Gekon 11 software*

